



Clinical Review Monitor  
RadiForce® MX270W





3.7MP RadiForce<sup>®</sup>  
MX270W


The RadiForce MX270W features a 27-inch large screen size and a 2560 x 1440 high-resolution which are ideal for displaying multiple imaging applications or windows to improve the work efficiency of physicians and radiologists.

- Environmentally-friendly LED backlight enables low-power-consumption of 93 watts.
- Grayscale tones adjusted at the factory to meet DICOM Part 14 for optimum viewing of medical DICOM images.
- Integrated Front Sensor housed within the front bezel measures grayscale tones according to a user-determined schedule and calibrates to the DICOM Part 14 standard.
- IPS panel with minimal color shift so several people can view the screen at once.
- Digital Uniformity Equalizer (DUE) function for optimum brightness uniformity.
- CAL Switch function offers four user-selectable mode settings for accurate viewing of any type of medical image.

Cabinet Color	Black
Panel Type	TFT Color LCD Panel (IPS)
Panel Size	68 cm / 27" (684 mm diagonal)
Display Size (H x V)	596.7 x 335.6 mm
Pixel Pitch	0.233 x 0.233 mm
Native Resolution	2560 x 1440 (16:9 aspect ratio)
Display Colors	10-bit colors (DisplayPort): 1.07 billion (maximum) colors 8-bit colors: 16.77 million from a palette of 68 billion colors
Viewing Angles (H,V)	178°, 178°
Brightness (typical)	300 cd/m <sup>2</sup>
Contrast Ratio (typical)	1000: 1
Response Time (typical)	12 ms (On/Off), 8 ms (Midtone)
Scanning Frequency (H, V)	31 - 89 kHz, 29.5 - 61 Hz (VGA Text: 69 - 71 Hz) Frame synchronous mode: 29.5 - 30.5 Hz, 59 - 61 Hz
Dot Clock	242 MHz
Input Terminals	DVI-D x 1, DisplayPort x 1
USB Ports / Standard	1 upstream, 2 downstream / Rev. 2.0
Power Requirements	AC 100 - 120 V, 200 - 240 V: 50 / 60 Hz
Power Consumption / Save Mode	93 W / Less than 1 W
Power Management	DVI DMPM, DisplayPort 1.1a
Sensor	Backlight Sensor, Integrated Front Sensor
OSD Languages	English, French, German, Italian, Japanese, Simplified Chinese, Spanish, Swedish, Traditional Chinese

Net Weight (With Stand / Without Stand)	11.1 kg / 8.4 kg
Hole Spacing	VESA standard 100 x 100 mm
Certifications and Standards <sup>1</sup>	CE (Medical Device Directive), EN60601-1, UL60601-1, CSA C22.2 No. 601-1, IEC60601-1, VCCI-B, FCC-B, Canadian ICES-003-B, C-tick, RoHS, CCC, GOST-R
FDA 510(k) Clearance	Pending (for General Radiography <sup>2</sup> )
Supplied Accessories	AC power cord, signal cables (DVI-D ~ DVI-D, DisplayPort ~ DisplayPort), USB cable, Utility Disk (RadiCS LE, ScreenManager Pro for Medical, user's manual), warranty card
Warranty	Five Years

Dimensions (Unit: mm)

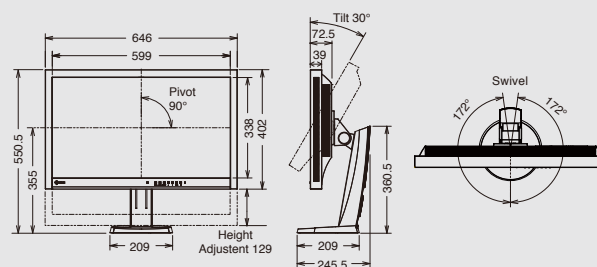

<sup>1</sup> Please contact the EIZO subsidiary or distributor in your country for the latest information. <sup>2</sup> Display of mammography images for diagnosis is not supported.



EIZO NANAO CORPORATION

153 Shimokashiwano, Hakusan, Ishikawa 924-8566 Japan  
Phone +81-76-277-6792 Fax +81-76-277-6793

radiforce.com

All product names are trademarks or registered trademarks of their respective companies. EIZO, RadiForce, FlexScan, ScreenManager, RadiCS and RadiNET are registered trademarks of Eizo Nanao Corporation. Specifications are subject to change without notice.